

FLOW SWITCHES

Type FQS

SAGInoMIYA

GENERAL DESCRIPTION

- For use on liquid lines such as water, ethylene glycol, or any non-corrosive fluid in chillers, pumps, condensers, boilers, etc.
- With S.P.D.T. contact mechanism.
- Paddle consists of three segments that can be removed or trimmed for use in 1 to 6" pipe.
- Drip proof models: Available upon request.

CE mark applicable (available upon request)

UL listed (available upon request)



SPECIFICATIONS


| Catalog No. | Paddle Size | Connection | | Max. Working Pressure MPa{kgf/cm ² } | Fluid Temp. (°C) | Max. Flow Velocity (m/s) | Wt. (kg) |
|-----------------|-------------|------------|-------|--|---------------------|-----------------------------|-------------|
| | | Size | Style | | | | |
| FQS-U30G | 3" | 1" | R | 0.98 {10} | 5~80 | 2 | 0.6 |

• Enclosure: IP20 (IP62 model: available upon request.)

ELECTRICAL RATINGS

| Rated Voltage (V) | | Power Factor (cos ϕ) | 125V. AC | 250V. AC |
|-----------------------|--------------|-------------------------------|----------|----------|
| Rated Amps. (A) | | | | |
| Non-Inductive Current | | 1 | 15 | 15 |
| Inductive Current | Full Load | 0.75 | 3.5 | 2.5 |
| | Locked Rotor | 0.45 | 21 | 15 |

DIMENSIONS

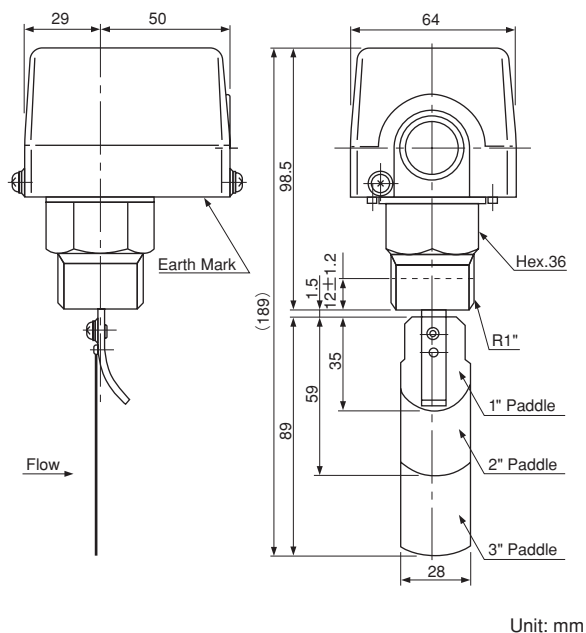

Unit: mm

OPERATION ADJUSTMENT RANGE TABLE

- When the operating value is not specified, the flow switch is shipped with the operating value set around the minimum flow rate.
- When you turn the flow adjusting screw clockwise, the operating point goes up. When you turn it counterclockwise, the operating point goes down.
- When more than two paddles is attached, you can change the flow rate adjustment range by removing the paddles one by one in order of the longer paddle first.

| Pipe Size | Paddle Size | * Adjustment range (L/min) | | | |
|-----------|-------------|----------------------------|---------------|---------------|---------------|
| | | Min. | | Max. | |
| | | Flow Decrease | Flow Increase | Flow Decrease | Flow Increase |
| 1" | | 18 | 28 | 45 | 55 |
| 1-1/4" | 1" | 43 | 53 | 100 | 120 |
| 1-1/2" | | 63 | 78 | 135 | 162 |
| 2" | 1"+2" | 50 | 65 | 150 | 180 |
| | 1" | 151 | 181 | 220 | 264 |
| 2-1/2" | 1"+2" | 105 | 126 | 355 | 426 |
| | 1" | 356 | 427 | 360 | 432 |
| 3" | 1"+2"+3" | 100 | 120 | 225 | 270 |
| | 1"+2" | 226 | 271 | 480 | 576 |
| | 1" | 481 | 577 | 510 | 612 |
| 4" | 1"+2"+3" | 200 | 240 | 385 | 462 |
| | 1"+2" | 386 | 463 | 820 | 984 |
| | 1" | 821 | 985 | 870 | 1044 |
| 5" | 1"+2"+3" | 350 | 420 | 594 | 713 |
| | 1"+2" | 595 | 714 | 1265 | 1518 |
| | 1" | 1266 | 1519 | 1342 | 1610 |
| 6" | 1"+2"+3" | 530 | 636 | 836 | 1003 |
| | 1"+2" | 837 | 1004 | 1780 | 2136 |
| | 1" | 1781 | 2137 | 1890 | 2268 |

* Flow decrease ... Flow amount at which the switch operates on flow decrease.
Flow increase ... Flow amount at which the switch operates on flow increase.